





SL40

Solar 60W / 80W / 100W / 120W LED Area Light
(Supplied Without Pole)

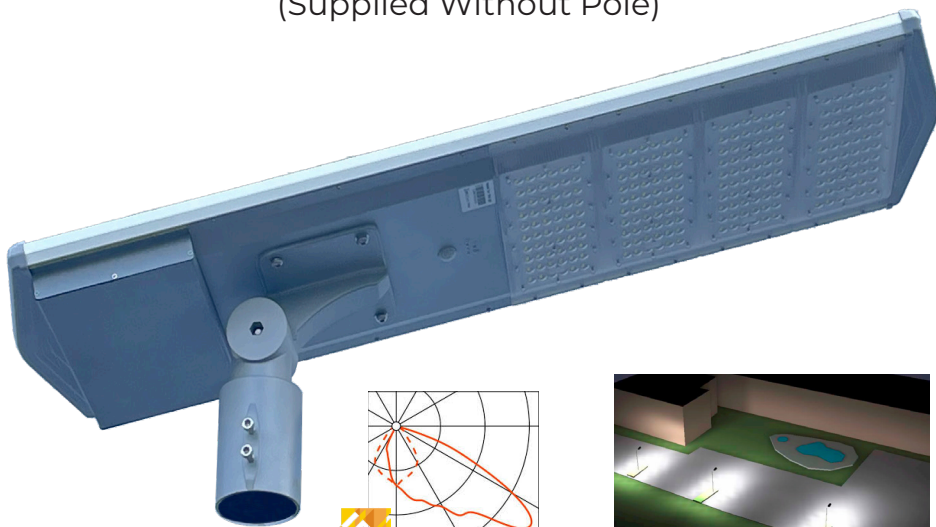

IES and lighting distribution data available for 40W, 60W, 80W & 100W Models.



Complete 3D lighting renderings available for your application.

This compact, integrated, all-in-one, solar area light fixture is offered with a choice of 60 Watt, 80 Watt, or 100 Watt LED power (up to 6,500~10,500 lumens). A 120W version (up to 12,500 lumens) is available by special order. It's designed to attach to the top of a 3" OD round pole. It can also be side-of-pole mounted or wall mounted (using an optional support arm). Three different programmable modes (and dimming options) are available using the IR remote control (included). This fixture is fitted with an integrated solar panel mounted discretely on the upper side. On the underside, there are several powerful LED modules and a motion sensor.



Li Lithium Iron
POWER TECHNOLOGY

Worldwide*
Shipping

Lowest Price*
Guarantee

Lifetime*
Tech Support

24 Month*
Product Warranty

No Hassle*
Returns

9120 Centerlinks Commerce Dr - Ste 3 • Fort Myers • FL • 33912 • USA • Phone: 239-461-5522 • Fax: 239-337-7887

MONDAY - FRIDAY 8:00AM - 8:00PM (US EASTERN TIME)


www.solarilluminations.com • sales@solarilluminations.com

*SUBJECT TO OUR TERMS & CONDITIONS, AND RETURNS POLICY



SL40

Solar 60W / 80W / 100W / 120W LED Area Light
(Supplied Without Pole)

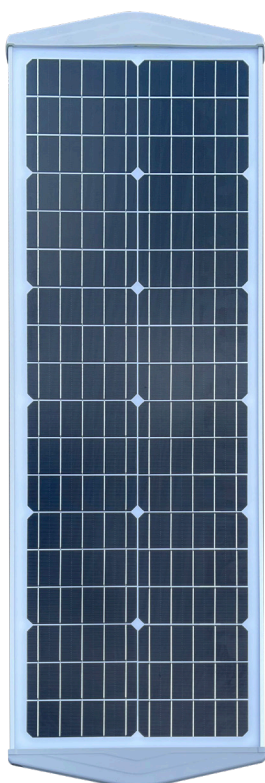

LUMINAIRE

- Three user/installer selectable operational mode choices.
- Timed mode – Offers automatic illumination at dusk at 100%, 70%, or 50% output
- Motion sensor mode – Automatic illumination at dusk upon motion detection at either 100%, 70%, or 50% output
- Mixed mode – Offers automatic illumination at dusk for up to 6 hours at 100%, 70%, or 50% output, then off, except upon motion detection until dawn at 100%, 70%, or 50% output
- Select and store the desired lighting mode and/or output using the included remote control
- 60 Watt provides 6,500 lumens
- 80 Watt provides 8,500 lumens
- 100 Watt provides 10,500 lumens
- 120 Watt version provides 12,500 lumens
- 5,500~6,000k LED color temperature
- Aluminum construction with gray finish
- IP65 weather rated
- 60W version dimensions approx. 38" x 14" x 4" (96cm x 35cm x 10cm)
- 80W version dimensions aprox. 44" x 14" x 4" (112cm x 35cm x 10cm)
- 100W version dimensions approx. 50" x 14" x 4" (127cm x 35cm x 10cm)
- 120W version dimensions approx. 56" x 14" x 4" (142cm x 35cm x 10cm)

SOLAR PANEL

- 60W version is fitted with a 18V 64W solar panel
- 80W version is fitted with a 18V 85W solar panel
- 100W version is fitted with a 18V 102W solar panel
- 120W version is fitted with a 18V 120W solar panel
- Glass covered solar panel is integrated into the top of the fixture

BATTERY

- Lithium battery is included and pre- installed
- 60W version is supplied with a 12.8V 302WH battery
- 80W version is supplied with a 12.8V 403WH battery
- 100W version is supplied with a 12.8V 502WH battery
- 120W version is supplied with a 12.8V 600WH battery

Worldwide*
Shipping

Lowest Price*
Guarantee

Lifetime*
Tech Support

24 Month*
Product Warranty


No Hassle*
Returns

9120 Centerlinks Commerce Dr - Ste 3 • Fort Myers • FL • 33912 • USA • Phone: 239-461-5522 • Fax: 239-337-7887

MONDAY - FRIDAY 8:00AM - 8:00PM (US EASTERN TIME)


www.solarilluminations.com • sales@solarilluminations.com

*SUBJECT TO OUR TERMS & CONDITIONS, AND RETURNS POLICY

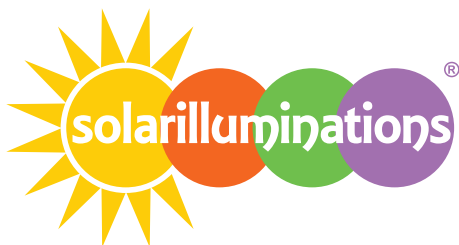

SL40

Solar 60W / 80W / 100W / 120W LED Area Light
(Supplied Without Pole)

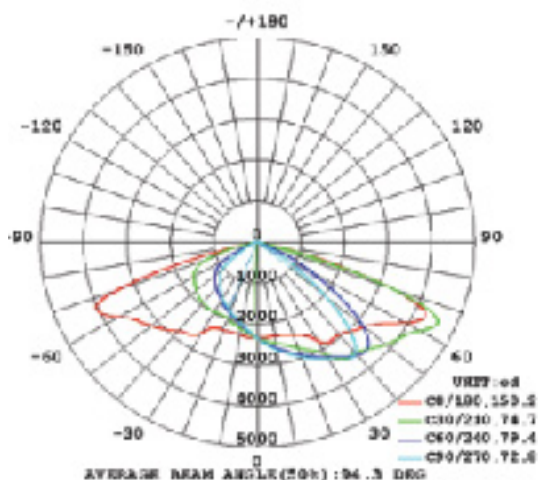

POLE

- Pole is not included. See product code SL41 if pole is required.
- This light fixture will mount to the top of a 3" diameter pole.
- An optional tenon/adaptor is required for other pole diameters (available as an option)
- This light fixture can also be attached to the side of a pole or vertical structure (e.g. wall or building).
- An optional side of pole or wall mount arm bracket is available as an option
- Maximum recommended mounting height for the fixture is as follows:
 - 60W version - Up to aprox. 26' (8M)
 - 80W version - Up to aprox. 29' (9M)
 - 100W version - Up to aprox. 33' (10M)
 - 120W version - Up to approx. 33' (10M)

CHARGE CONTROL

- Internal battery overcharge and discharge



Remote control included to select and store the desired operational mode

Worldwide*
Shipping

Lowest Price*
Guarantee

Lifetime*
Tech Support

24 Month*
Product Warranty

No Hassle*
Returns

9120 Centerlinks Commerce Dr - Ste 3 • Fort Myers • FL • 33912 • USA • Phone: 239-461-5522 • Fax: 239-337-7887

MONDAY - FRIDAY 8:00AM - 8:00PM (US EASTERN TIME)

www.solarilluminations.com • sales@solarilluminations.com

*SUBJECT TO OUR TERMS & CONDITIONS, AND RETURNS POLICY